



**VENSOR**
MORE POWER TO YOU

www.vensorindia.com



Light UP in your Dream Home

PRODUCT &
TECHNICAL
CATALOG

20
24

EDITION 02



INTUITIVE LIGHTING SOLUTIONS BY VENSOR

At Vensor, we are all about generating bright ideas that are powered by intuitive innovation and state-of-the-art technology. Our passion is backed by our relentless team of employees, with extensive expertise in research, development and manufacturing process, and are constantly motivated to revolutionize electrical solutions to cater to the ever-changing needs of the modern times. Vensor offers you wide range of LED lighting products.

LED

Light UP in your Dream Home

CONTENT

01 **PANEL DOWN LIGHT**
HALO / HALO PLUS / GLOBUS
GLO-STAR / TRON
Page No. 01-14

04 **COB SPOT LIGHT**
PIXEL / ROXX / LUMEX
BEAMAX TRACK
Page No. 19-28

07 **OUTDOOR STREET
& FLOOD LIGHT**
LEXA / BRILEX / E-LITE / GLEAM
Page No. 41-44

10 **WALL LIGHT**
MIRAZ / AURO / OLIVE
ORBIT / VOILA / FUSSION
Page No. 53-60

02 **SURFACE PANEL
DOWN LIGHT**
RADIA / PEARL
Page No. 15-18

05 **DEEP J. BOX LIGHT**
NIO / RIO / OTIZ / ZIMA
YUBA / CLARO / XOLO
Page No. 29-34

08 **T-5 LED BATTEN LIGHT**
ZENTILO T-5 / T-8
QUORRA
Page No. 45-50

11 **ROPE LIGHT**
BRILLO
BRILLO CONNECTOR
Page No. 61-62

03 **COMMERCIAL PANEL
DOWN LIGHT**
AIRGLOW 1X1 / AIRGLOW 2X2
Page No. 19-20

06 **CONCEALED J.
BOX LIGHT**
POCO / GINO / STYLO
ASTON / FIGO
Page No. 35-40

09 **DECORATION
LAMP**
DECO
Page No. 51-52



The Power of Light

Light affects how we feel, Influences the way we respond to the world around us and has a major impact on our decision-making process. At VENSOR, we have the breadth of products, the solution controls and the end-to-end services to help you take full advantage of today's advanced LED lighting solution. This catalogue explains the critical role lighting plays in illuminating settings, creating a mood that makes people feel comfortable from the moment they arrive, meeting the lighting requirements for many different activities and ultimately, delivering an ambience that makes people feel comfortable in their surroundings.

HALO

SLIM LED PANEL LIGHTS ROUND

Brighten
your
surroundings.
Illuminate
your life.



VESNOR LED lights offer a wide range of illumination options that liven up your surroundings in myriad ways. In addition, they are easy to use, highly durable, and available in a variety of aesthetically appealing designs.



PANEL LIGHTS HALO SLIM LED PANEL LIGHTS ROUND

ITEM CODE	WATTAGE	OPERAT. VOLTAGE	POWER FACTOR	LUMEN OUTPUT	COLOUR TEMP.	CRI	BEAM ANGLE	IP	DIMENSIONS IN MM	CUT OUT DIMENS.IN MM	MRP	PKG
31003	3	85-285V	≥ 0.9	-	3000K	80	120	-	95 x 23	75	321.00	100
31003	3	85-285V	≥ 0.9	-	4000K	80	120	-	95 x 23	75	321.00	100
31003	3	85-285V	≥ 0.9	-	6000K	80	120	-	95 x 23	75	321.00	100
31006	6	85-285V	≥ 0.9	-	3000K	80	120	-	120 x 23	100	447.00	60
31006	6	85-285V	≥ 0.9	-	4000K	80	120	-	120 x 23	100	447.00	60
31006	6	85-285V	≥ 0.9	-	6000K	80	120	-	120 x 23	100	447.00	60
31010	10	85-285V	≥ 0.9	-	3000K	80	120	-	150 x 23	125	690.00	40
31010	10	85-285V	≥ 0.9	-	4000K	80	120	-	150 x 23	125	690.00	40
31010	10	85-285V	≥ 0.9	-	6000K	80	120	-	150 x 23	125	690.00	40
31015	15	85-285V	≥ 0.9	-	3000K	80	120	-	170 x 23	150	832.00	40
31015	15	85-285V	≥ 0.9	-	4000K	80	120	-	170 x 23	150	832.00	40
31015	15	85-285V	≥ 0.9	-	6000K	80	120	-	170 x 23	150	832.00	40
31020	20	85-285V	≥ 0.9	-	3000K	80	120	-	220 x 23	200	1137.00	20
31020	20	85-285V	≥ 0.9	-	4000K	80	120	-	220 x 23	200	1137.00	20
31020	20	85-285V	≥ 0.9	-	6000K	80	120	-	220 x 23	200	1137.00	20





HALO

SLIM LED PANEL LIGHTS SQUARE

USP
OF THE
PRODUCT
GOES
HERE



PANEL LIGHTS HALO SLIM LED PANEL LIGHTS SQUARE

ITEM CODE	WATTAGE	OPERAT. VOLTAGE	POWER FACTOR	LUMEN OUTPUT	COLOUR TEMP.	CRI	BEAM ANGLE	IP	DIMENSIONS IN MM	CUT OUT DIMENS.IN MM	MRP	PKG
31003	3	85-285V	≥ 0.9	-	3000K	80	120	-	95 x 95 x 23	75 x 75	321.00	100
31003	3	85-285V	≥ 0.9	-	4000K	80	120	-	95 x 95 x 23	75 x 75	321.00	100
31003	3	85-285V	≥ 0.9	-	6000K	80	120	-	95 x 95 x 23	75 x 75	321.00	100
31006	6	85-285V	≥ 0.9	-	3000K	80	120	-	120 x 120 x 23	100 x 100	447.00	60
31006	6	85-285V	≥ 0.9	-	4000K	80	120	-	120 x 120 x 23	100 x 100	447.00	60
31006	6	85-285V	≥ 0.9	-	6000K	80	120	-	120 x 120 x 23	100 x 100	447.00	60
31010	10	85-285V	≥ 0.9	-	3000K	80	120	-	150 x 150 x 23	125 x 125	690.00	40
31010	10	85-285V	≥ 0.9	-	4000K	80	120	-	150 x 150 x 23	125 x 125	690.00	40
31010	10	85-285V	≥ 0.9	-	6000K	80	120	-	150 x 150 x 23	125 x 125	690.00	40
31015	15	85-285V	≥ 0.9	-	3000K	80	120	-	170 x 170 x 23	150 x 150	832.00	40
31015	15	85-285V	≥ 0.9	-	4000K	80	120	-	170 x 170 x 23	150 x 150	832.00	40
31015	15	85-285V	≥ 0.9	-	6000K	80	120	-	170 x 170 x 23	150 x 150	832.00	40
31020	20	85-285V	≥ 0.9	-	3000K	80	120	-	220 x 220 x 23	200 x 200	1137.00	20
31020	20	85-285V	≥ 0.9	-	4000K	80	120	-	220 x 220 x 23	200 x 200	1137.00	20
31020	20	85-285V	≥ 0.9	-	6000K	80	120	-	220 x 220 x 23	200 x 200	1137.00	20



HALO PLUS
SLIM LED PANEL LIGHTS ROUND

Brighten
your
surroundings.
Illuminate
your life.

VESNOR LED lights offer a wide range of illumination options that liven up your surroundings in myriad ways. In addition, they are easy to use, highly durable, and available in a variety of aesthetically appealing designs.



PANEL LIGHTS
HALO PLUS SLIM LED PANEL LIGHTS ROUND


ITEM CODE	WATTAGE	OPERAT. VOLTAGE	POWER FACTOR	LUMEN OUTPUT	COLOUR TEMP.	CRI	BEAM ANGLE	IP	DIMENSIONS IN MM	CUT OUT DIMENS.IN MM	MRP	PKG
37003	3	85-285V	≥ 0.9	-	3000K	80	120	-	95 x 23	75	325.00	100
37003	3	85-285V	≥ 0.9	-	4000K	80	120	-	95 x 23	75	325.00	100
37003	3	85-285V	≥ 0.9	-	6000K	80	120	-	95 x 23	75	325.00	100
37006	6	85-285V	≥ 0.9	-	3000K	80	120	-	120 x 23	100	450.00	60
37006	6	85-285V	≥ 0.9	-	4000K	80	120	-	120 x 23	100	450.00	60
37006	6	85-285V	≥ 0.9	-	6000K	80	120	-	120 x 23	100	450.00	60
37010	10	85-285V	≥ 0.9	-	3000K	80	120	-	150 x 23	125	700.00	40
37010	10	85-285V	≥ 0.9	-	4000K	80	120	-	150 x 23	125	700.00	40
37010	10	85-285V	≥ 0.9	-	6000K	80	120	-	150 x 23	125	700.00	40
37015	15	85-285V	≥ 0.9	-	3000K	80	120	-	170 x 23	150	835.00	40
37015	15	85-285V	≥ 0.9	-	4000K	80	120	-	170 x 23	150	835.00	40
37015	15	85-285V	≥ 0.9	-	6000K	80	120	-	170 x 23	150	835.00	40
37020	20	85-285V	≥ 0.9	-	3000K	80	120	-	220 x 23	200	1135.00	20
37020	20	85-285V	≥ 0.9	-	4000K	80	120	-	220 x 23	200	1135.00	20
37020	20	85-285V	≥ 0.9	-	6000K	80	120	-	220 x 23	200	1135.00	20



HALO PLUS
SLIM LED PANEL LIGHTS SQUARE



USP
OF THE
PRODUCT
GOES
HERE



PANEL LIGHTS
HALO PLUS SLIM LED PANEL LIGHTS SQUARE

ITEM CODE	WATTAGE	OPERAT. VOLTAGE	POWER FACTOR	LUMEN OUTPUT	COLOUR TEMP.	CRI	BEAM ANGLE	IP	DIMENSIONS IN MM	CUT OUT DIMENS.IN MM	MRP	PKG
37003	3	85-285V	≥ 0.9	-	3000K	80	120	-	95 x 95 x 23	75 x 75	325.00	100
37003	3	85-285V	≥ 0.9	-	4000K	80	120	-	95 x 95 x 23	75 x 75	325.00	100
37003	3	85-285V	≥ 0.9	-	6000K	80	120	-	95 x 95 x 23	75 x 75	325.00	100
37006	6	85-285V	≥ 0.9	-	3000K	80	120	-	120 x 120 x 23	100 x 100	450.00	60
37006	6	85-285V	≥ 0.9	-	4000K	80	120	-	120 x 120 x 23	100 x 100	450.00	60
37006	6	85-285V	≥ 0.9	-	6000K	80	120	-	120 x 120 x 23	100 x 100	450.00	60
37010	10	85-285V	≥ 0.9	-	3000K	80	120	-	150 x 150 x 23	125 x 125	700.00	40
37010	10	85-285V	≥ 0.9	-	4000K	80	120	-	150 x 150 x 23	125 x 125	700.00	40
37010	10	85-285V	≥ 0.9	-	6000K	80	120	-	150 x 150 x 23	125 x 125	700.00	40
37015	15	85-285V	≥ 0.9	-	3000K	80	120	-	170 x 170 x 23	150 x 150	835.00	40
37015	15	85-285V	≥ 0.9	-	4000K	80	120	-	170 x 170 x 23	150 x 150	835.00	40
31015	15	85-285V	≥ 0.9	-	6000K	80	120	-	170 x 170 x 23	150 x 150	835.00	40
37020	20	85-285V	≥ 0.9	-	3000K	80	120	-	220 x 220 x 23	200 x 200	1135.00	20
37020	20	85-285V	≥ 0.9	-	4000K	80	120	-	220 x 220 x 23	200 x 200	1135.00	20
37020	20	85-285V	≥ 0.9	-	6000K	80	120	-	220 x 220 x 23	200 x 200	1135.00	20



Globus

LED PANEL
DOWN LIGHTS
ROUND/SQUARE



Infuse a dash of style in any setting!
Available in round and square shapes,
the LED Panel is modern, and
exceptionally beautiful!



PANEL LIGHTS GLOBUS LED PANEL DOWN LIGHT ROUND

ITEM CODE	WATTAGE	OPERAT. VOLTAGE	POWER FACTOR	LUMEN OUTPUT	COLOUR TEMP.	CRI	BEAM ANGLE	IP	DIMENSIONS IN MM	CUT OUT DIMENS. IN MM	MRP	PKG
33008	8	85-285V	≥ 0.9	-	3000K	80	120	-	118 x 28	100	512.00	60
33008	8	85-285V	≥ 0.9	-	4000K	80	120	-	118 x 28	100	512.00	60
33008	8	85-285V	≥ 0.9	-	6000K	80	120	-	118 x 28	100	512.00	60
33012	12	85-285V	≥ 0.9	-	3000K	80	120	-	143 x 28	125	765.00	40
33012	12	85-285V	≥ 0.9	-	4000K	80	120	-	143 x 28	125	765.00	40
33012	12	85-285V	≥ 0.9	-	6000K	80	120	-	143 x 28	125	765.00	40
33018	18	85-285V	≥ 0.9	-	3000K	80	120	-	168 x 28	150	950.00	20
33018	18	85-285V	≥ 0.9	-	4000K	80	120	-	168 x 28	150	950.00	20
33018	18	85-285V	≥ 0.9	-	6000K	80	120	-	168 x 28	150	950.00	20

GLOBUS LED PANEL DOWN LIGHT SQUARE

33008	8	85-285V	≥ 0.9	-	3000K	80	120	-	118 x 118 x 28	100 x 100	512.00	60
33008	8	85-285V	≥ 0.9	-	4000K	80	120	-	118 x 118 x 28	100 x 100	512.00	60
33008	8	85-285V	≥ 0.9	-	6000K	80	120	-	118 x 118 x 28	100 x 100	512.00	60
33012	12	85-285V	≥ 0.9	-	3000K	80	120	-	143 x 143 x 28	125 x 125	765.00	40
33012	12	85-285V	≥ 0.9	-	4000K	80	120	-	143 x 143 x 28	125 x 125	765.00	40
33012	12	85-285V	≥ 0.9	-	6000K	80	120	-	143 x 143 x 28	125 x 125	765.00	40
33018	18	85-285V	≥ 0.9	-	3000K	80	120	-	168 x 168 x 28	150 x 150	950.00	20
33018	18	85-285V	≥ 0.9	-	4000K	80	120	-	168 x 168 x 28	150 x 150	950.00	20
33018	18	85-285V	≥ 0.9	-	6000K	80	120	-	168 x 168 x 28	150 x 150	950.00	20



Glo-Star

LED PANEL DOWN LIGHTS
ROUND/SQUARE

Infuse a dash of style in any setting! Available in round and square shapes, the LED Panel is modern, and exceptionally beautiful!



PANEL LIGHTS GLO-STAR LED PANEL DOWN LIGHT ROUND

ITEM CODE	WATTAGE	OPERAT. VOLTAGE	POWER FACTOR	LUMEN OUTPUT	COLOUR TEMP.	CRI	BEAM ANGLE	IP	DIMENSIONS IN MM	CUT OUT DIMENS.IN MM	MRP	PKG
34010	10	85-285V	≥ 0.9	-	3000K	80	120	-	118 x 40	100	650.00	60
34010	10	85-285V	≥ 0.9	-	4000K	80	120	-	118 x 40	100	650.00	60
34010	10	85-285V	≥ 0.9	-	6000K	80	120	-	118 x 40	100	650.00	60
34015	15	85-285V	≥ 0.9	-	3000K	80	120	-	168 x 40	150	920.00	40
34015	15	85-285V	≥ 0.9	-	4000K	80	120	-	168 x 40	150	920.00	40
34015	15	85-285V	≥ 0.9	-	6000K	80	120	-	168 x 40	150	920.00	40
34020	20	85-285V	≥ 0.9	-	3000K	80	120	-	218 x 40	200	1250.00	20
34020	20	85-285V	≥ 0.9	-	4000K	80	120	-	218 x 40	200	1250.00	20
34020	20	85-285V	≥ 0.9	-	6000K	80	120	-	218 x 40	200	1250.00	20

GLO-STAR LED PANEL DOWN LIGHT SQUARE


34010	10	85-285V	≥ 0.9	-	3000K	80	120	-	118 x 118 x 40	100 x 100	650.00	60
34010	10	85-285V	≥ 0.9	-	4000K	80	120	-	118 x 118 x 40	100 x 100	650.00	60
34010	10	85-285V	≥ 0.9	-	6000K	80	120	-	118 x 118 x 40	100 x 100	650.00	60
34015	15	85-285V	≥ 0.9	-	3000K	80	120	-	168 x 168 x 40	150 x 150	920.00	40
34015	15	85-285V	≥ 0.9	-	4000K	80	120	-	168 x 168 x 40	150 x 150	920.00	40
34015	15	85-285V	≥ 0.9	-	6000K	80	120	-	168 x 168 x 40	150 x 150	920.00	40
34020	20	85-285V	≥ 0.9	-	3000K	80	120	-	218 x 218 x 40	200 x 200	1250.00	20
34020	20	85-285V	≥ 0.9	-	4000K	80	120	-	218 x 218 x 40	200 x 200	1250.00	20
34020	20	85-285V	≥ 0.9	-	6000K	80	120	-	218 x 218 x 40	200 x 200	1250.00	20



TRON

LED PANEL LIGHTS

TRON is an aesthetically designed, slim LED panel light. Available in multiple sizes, it is made of pressure die cast aluminium housing and has an anti-glare diffuser.



PANEL LIGHTS TRON LED PANEL DOWN LIGHT ROUND

ITEM CODE	WATTAGE	OPERAT. VOLTAGE	POWER FACTOR	LUMEN OUTPUT	COLOUR TEMP.	CRI	BEAM ANGLE	IP	DIMENSIONS IN MM	CUT OUT DIMENS.IN MM	MRP	PKG
38006	6	85-285V	≥ 0.95	-	3000K	80	120	-	105 x 30	75	280.00	80
38006	6	85-285V	≥ 0.95	-	4000K	80	120	-	105 x 30	75	280.00	80
38006	6	85-285V	≥ 0.95	-	6000K	80	120	-	105 x 30	75	280.00	80
38012	12	85-285V	≥ 0.95	-	3000K	80	120	-	130 x 30	105	380.00	60
38012	12	85-285V	≥ 0.95	-	4000K	80	120	-	130 x 30	105	380.00	60
38012	12	85-285V	≥ 0.95	-	6000K	80	120	-	130 x 30	105	380.00	60
38015	15	85-285V	≥ 0.95	-	3000K	80	120	-	150 x 30	125	480.00	40
38015	15	85-285V	≥ 0.95	-	4000K	80	120	-	150 x 30	125	480.00	40
38015	15	85-285V	≥ 0.95	-	6000K	80	120	-	150 x 30	125	480.00	40






Pearl
SURFACE LED
PANEL LIGHTS

PEARL Frameless Panel Light can be fixed directly on ceilings with minimal effort! Extremely stylish in appearance, this is a great piece of adornment when you do not have false ceilings!



SURFACE PANEL LIGHTS
PERAL SURFACE LED PANEL LIGHT ROUND

ITEM CODE	WATTAGE	OPERAT. VOLTAGE	POWER FACTOR	LUMEN OUTPUT	COLOUR TEMP.	CRI	BEAM ANGLE	IP	DIMENSIONS IN MM	CUT OUT DIMENS.IN MM	MRP	PKG
36006	6	85-285V	≥ 0.9	-	3000K	80	120	-	100 x 31	-	742.00	60
36006	6	85-285V	≥ 0.9	-	4000K	80	120	-	100 x 31	-	742.00	60
36006	6	85-285V	≥ 0.9	-	6000K	80	120	-	100 x 31	-	742.00	60
36012	12	85-285V	≥ 0.9	-	3000K	80	120	-	125 x 31	-	1240.00	40
36012	12	85-285V	≥ 0.9	-	4000K	80	120	-	125 x 31	-	1240.00	40
36012	12	85-285V	≥ 0.9	-	6000K	80	120	-	125 x 31	-	1240.00	40
36018	18	85-285V	≥ 0.9	-	3000K	80	120	-	148 x 31	-	1675.00	20
36018	18	85-285V	≥ 0.9	-	4000K	80	120	-	148 x 31	-	1675.00	20
36018	18	85-285V	≥ 0.9	-	6000K	80	120	-	148 x 31	-	1675.00	20

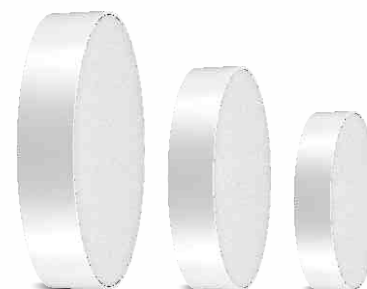

RADIA

LED PANEL
DOWN LIGHT



3 Easy Simple Steps to Happiness
ROTATE, FIT & ON



SURFACE PANEL LIGHTS RADIA SURFACE LED PANEL LIGHT ROUND

ITEM CODE	WATTAGE	OPERAT. VOLTAGE	POWER FACTOR	LUMEN OUTPUT	COLOUR TEMP.	CRI	BEAM ANGLE	IP	DIMENSIONS IN MM	CUT OUT DIMENS. IN MM	MRP	PKG
35007	7	85-285V	≥ 0.9	-	3000K	80	120	-	85 x 50	-	570.00	100
35007	7	85-285V	≥ 0.9	-	4000K	80	120	-	85 x 50	-	570.00	100
35007	7	85-285V	≥ 0.9	-	6000K	80	120	-	85 x 50	-	570.00	100
35007	7	85-285V	≥ 0.9	-	RED	80	120	-	85 x 50	-	570.00	100
35007	7	85-285V	≥ 0.9	-	GREEN	80	120	-	85 x 50	-	570.00	100
35007	7	85-285V	≥ 0.9	-	BLUE	80	120	-	85 x 50	-	570.00	100
35009	9	85-285V	≥ 0.9	-	3000K	80	120	-	110 x 50	-	676.00	60
35009	9	85-285V	≥ 0.9	-	4000K	80	120	-	110 x 50	-	676.00	60
35009	9	85-285V	≥ 0.9	-	6000K	80	120	-	110 x 50	-	676.00	60
35009	9	85-285V	≥ 0.9	-	RED	80	120	-	110 x 50	-	676.00	60
35009	9	85-285V	≥ 0.9	-	GREEN	80	120	-	110 x 50	-	676.00	60
35009	9	85-285V	≥ 0.9	-	BLUE	80	120	-	110 x 50	-	676.00	60
35012	12	85-285V	≥ 0.9	-	3000K	80	120	-	135 x 50	-	804.00	40
35012	12	85-285V	≥ 0.9	-	4000K	80	120	-	135 x 50	-	804.00	40
35012	12	85-285V	≥ 0.9	-	6000K	80	120	-	135 x 50	-	804.00	40
35012	12	85-285V	≥ 0.9	-	RED	80	120	-	135 x 50	-	804.00	40
35012	12	85-285V	≥ 0.9	-	GREEN	80	120	-	135 x 50	-	804.00	40
35012	12	85-285V	≥ 0.9	-	BLUE	80	120	-	135 x 50	-	804.00	40
35015	15	85-285V	≥ 0.9	-	3000K	80	120	-	135 x 50	-	940.00	40
35015	15	85-285V	≥ 0.9	-	4000K	80	120	-	135 x 50	-	940.00	40
35015	15	85-285V	≥ 0.9	-	6000K	80	120	-	135 x 50	-	940.00	40
35015	15	85-285V	≥ 0.9	-	RED	80	120	-	135 x 50	-	940.00	40
35015	15	85-285V	≥ 0.9	-	GREEN	80	120	-	135 x 50	-	940.00	40
35015	15	85-285V	≥ 0.9	-	BLUE	80	120	-	135 x 50	-	940.00	40

AIRGLOW

COMMERCIAL LED LIGHTS SQUARE

A perfect choice for hassle free installation. Deep Drawn Panel is a perfect choice for Armstrong and grid ceilings, suitable for modern commercial spaces.




PANEL LIGHTS AIRGLOW PANEL LIGHTS 1X1

ITEM CODE	WATTAGE	OPERAT. VOLTAGE	POWER FACTOR	LUMEN OUTPUT	COLOUR TEMP.	CRI	BEAM ANGLE	IP	DIMENSIONS IN MM	CUT OUT DIMENS. IN MM	MRP	PKG
30024	24	85-285V	≥ 0.9	-	3000K	80	120	-	300 x 300 x 23	275 x 275	1690.00	20
30024	24	85-285V	≥ 0.9	-	4000K	80	120	-	300 x 300 x 23	275 x 275	1690.00	20
30024	24	85-285V	≥ 0.9	-	6000K	80	120	-	300 x 300 x 23	275 x 275	1690.00	20

PANEL LIGHTS AIRGLOW COMMERCIAL PANEL LIGHTS 2X2



ITEM CODE	WATTAGE	OPERAT. VOLTAGE	POWER FACTOR	LUMEN OUTPUT	COLOUR TEMP.	CRI	BEAM ANGLE	IP	DIMENSIONS IN MM	CUT OUT DIMENS. IN MM	MRP	PKG
30040	40	85-285V	≥ 0.9	-	3000K	80	120	-	600 x 600 x 50	-	3000.00	6
30040	40	85-285V	≥ 0.9	-	4000K	80	120	-	600 x 600 x 50	-	3000.00	6
30040	40	85-285V	≥ 0.9	-	6000K	80	120	-	600 x 600 x 50	-	3000.00	6

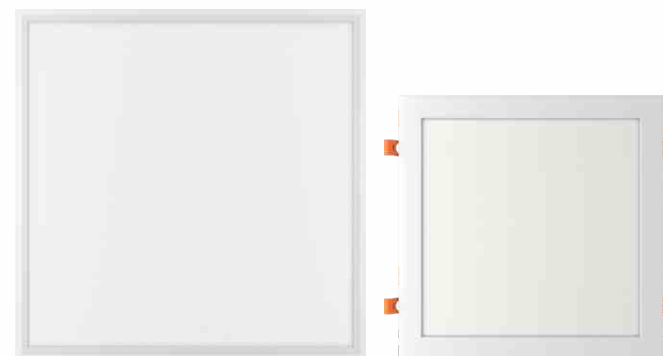

PIXEL

DEEP COB SPOT LIGHT

A brilliantly crafted masterpiece, PIXEL Deep COB Spot Light lets you create a spectacular ambience for your personal space. The 4 beautiful inner reflector colors-Black, Gold, Rose Gold & Silver chrome lend the downlight an unmatched appearance.

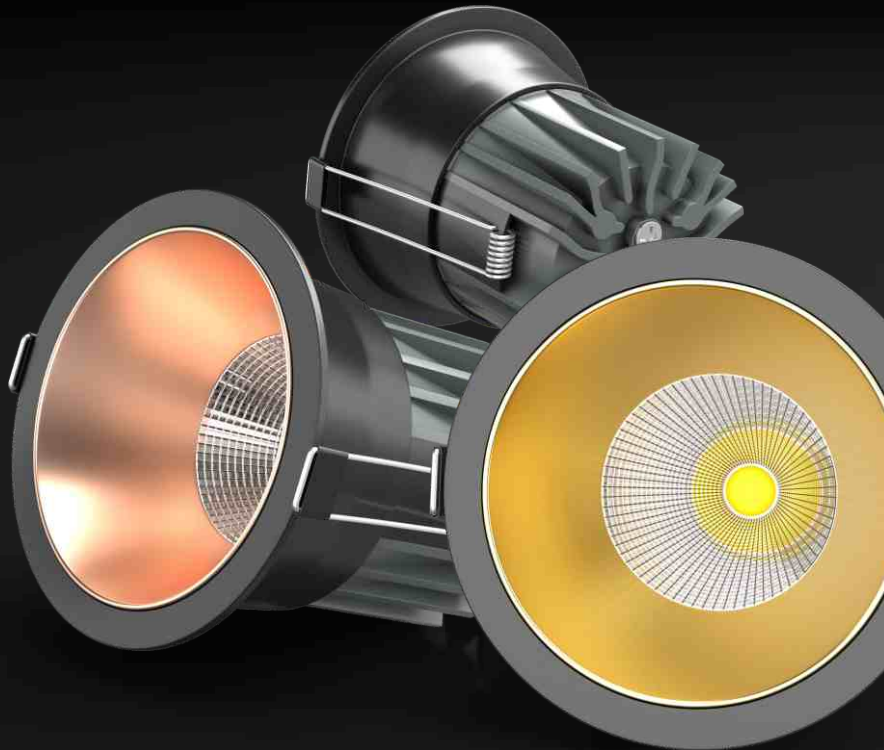

COB SPOT LIGHTS PIXEL DEEP COB SPOT LIGHT

ITEM CODE	WATTAGE	OPERAT. VOLTAGE	POWER FACTOR	LUMEN OUTPUT	COLOUR TEMP.	CRI	BEAM ANGLE	IP	DIMENSIONS IN MM	CUT OUT DIMENS.IN MM	MRP	PKG
41007	7	85-285V	≥ 0.9	-	3000K	80	38	-	62 x 62	55	1156.00	50
41007	7	85-285V	≥ 0.9	-	4000K	80	38	-	62 x 62	55	1156.00	50
41007	7	85-285V	≥ 0.9	-	6000K	80	38	-	62 x 62	55	1156.00	50
41012	12	85-285V	≥ 0.9	-	3000K	80	38	-	85 x 80	75	1535.00	40
41012	12	85-285V	≥ 0.9	-	4000K	80	38	-	85 x 80	75	1535.00	40
41012	12	85-285V	≥ 0.9	-	6000K	80	38	-	85 x 80	75	1535.00	40

Note : Available in different colour reflector : Gold | Silver | Rose Gold | Titanium Black



▲
Gold Reflector



▲
Silver Reflector



▲
Rose Gold Reflector




▲
Titanium Black Reflector



ROXX

DEEP COB SPOT LIGHT

A brilliantly crafted masterpiece, ROXX Deep COB Spot Light lets you create a spectacular ambience for your personal space. The 4 beautiful inner reflector colors-Black, Gold, Rose Gold & Silver chrome lend the downlight an unmatched appearance.

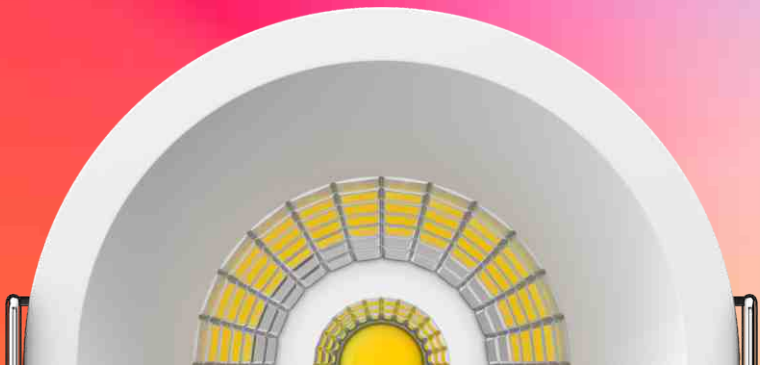

DEEP COB SPOT LIGHTS ROXX DEEP COB SPOT LIGHT (PC)


ITEM CODE	WATTAGE	OPERAT. VOLTAGE	POWER FACTOR	LUMEN OUTPUT	COLOUR TEMP.	CRI	BEAM ANGLE	IP	DIMENSIONS IN MM	CUT OUT DIMENS.IN MM	MRP	PKG
45007	7	85-285V	≥ 0.9	-	3000K	80	38	-	62 x 62	55	880.00	50
45007	7	85-285V	≥ 0.9	-	4000K	80	38	-	62 x 62	55	880.00	50
45007	7	85-285V	≥ 0.9	-	6000K	80	38	-	62 x 62	55	880.00	50
45012	12	85-285V	≥ 0.9	-	3000K	80	38	-	85 x 80	75	1280.00	40
45012	12	85-285V	≥ 0.9	-	4000K	80	38	-	85 x 80	75	1280.00	40
45012	12	85-285V	≥ 0.9	-	6000K	80	38	-	85 x 80	75	1280.00	40



LUMAX

COB SPOT LIGHT

Create an oasis of beautiful glow with LUMAX Fixed COB Lights. Easy to install, they are the perfect fit for are laxing ambience washed in gleaming lighting.

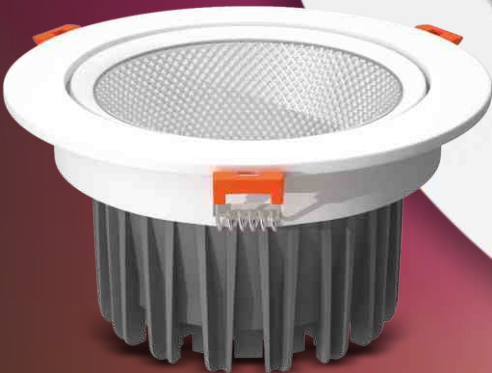

COB SPOT LIGHTS LUMAX COB SPOT LIGHT

ITEM CODE	WATTAGE	OPERAT. VOLTAGE	POWER FACTOR	LUMEN OUTPUT	COLOUR TEMP.	CRI	BEAM ANGLE	IP	DIMENSIONS IN MM	CUT OUT DIMENS.IN MM	MRP	PKG
42005	5	85-285V	≥ 0.9	-	3000K	80	38	-	70 x 45	50	612.00	50
42005	5	85-285V	≥ 0.9	-	4000K	80	38	-	70 x 45	50	612.00	50
42005	5	85-285V	≥ 0.9	-	6000K	80	38	-	70 x 45	50	612.00	50
42010	10	85-285V	≥ 0.9	-	3000K	80	38	-	85 x 60	65	916.00	50
42010	10	85-285V	≥ 0.9	-	4000K	80	38	-	85 x 60	65	916.00	50
42010	10	85-285V	≥ 0.9	-	6000K	80	38	-	85 x 60	65	916.00	50
42015	15	85-285V	≥ 0.9	-	3000K	80	38	-	110 x 70	85	1507.00	20
42015	15	85-285V	≥ 0.9	-	4000K	80	38	-	110 x 70	85	1507.00	20
42015	15	85-285V	≥ 0.9	-	6000K	80	38	-	110 x 70	85	1507.00	20
42025	25	85-285V	≥ 0.9	-	3000K	80	38	-	136 x 80	115	2115.00	20
42025	25	85-285V	≥ 0.9	-	4000K	80	38	-	136 x 80	115	2115.00	20
42025	25	85-285V	≥ 0.9	-	6000K	80	38	-	136 x 80	115	2115.00	20
42035	35	85-285V	≥ 0.9	-	3000K	80	38	-	160 x 85	135	2690.00	20
42035	35	85-285V	≥ 0.9	-	4000K	80	38	-	160 x 85	135	2690.00	20
42035	35	85-285V	≥ 0.9	-	6000K	80	38	-	160 x 85	135	2690.00	20





BEAMAX

COB SPOT
TRACK LIGHT

Beautifully crafted, this BEAMAX light incorporates a revolving module that can be used to highlight a painting, decor or can be used for light reading. The cylindrical canopy helps to get mounted on any space for focused lighting. Simple yet chic!



BEAMAX

COB SPOT SURFACE
TRACK LIGHT



COB SPOT LIGHTS BEAMAX COB SPOT TRACK LIGHT

ITEM CODE	WATTAGE	OPERAT. VOLTAGE	POWER FACTOR	LUMEN OUTPUT	COLOUR TEMP.	CRI	BEAM ANGLE	IP	DIMENSIONS IN MM	CUT OUT DIMENS. IN MM	MRP	PKG
43010	10	85-285V	≥ 0.9	-	3000K	80	38	-	50 x 130 x 138	-	1246.00	30
43010	10	85-285V	≥ 0.9	-	4000K	80	38	-	50 x 130 x 138	-	1246.00	30
43010	10	85-285V	≥ 0.9	-	6000K	80	38	-	50 x 130 x 138	-	1246.00	30
43020	20	85-285V	≥ 0.9	-	3000K	80	38	-	66 x 160 x 158	-	2237.00	30
43020	20	85-285V	≥ 0.9	-	4000K	80	38	-	66 x 160 x 158	-	2237.00	30
43020	20	85-285V	≥ 0.9	-	6000K	80	38	-	66 x 160 x 158	-	2237.00	30
43030	30	85-285V	≥ 0.9	-	3000K	80	38	-	77 x 178 x 180	-	2875.00	30
43030	30	85-285V	≥ 0.9	-	4000K	80	38	-	77 x 178 x 180	-	2875.00	30
43030	30	85-285V	≥ 0.9	-	6000K	80	38	-	77 x 178 x 180	-	2875.00	30

BEAMAX COB SPOT TRACK LIGHT LINEAR

43009	10	85-285V	≥ 0.9	-	3000K	80	38	-	50 x 130 x 138 x 67	-	720.00	30
-------	----	---------	-------	---	-------	----	----	---	---------------------	---	--------	----

BEAMAX COB SPOT SURFACE TRACK LIGHT

44010	10	85-285V	≥ 0.9	-	3000K	80	38	-	50 x 130 x 138 x 67	-	1246.00	30
44010	10	85-285V	≥ 0.9	-	4000K	80	38	-	50 x 130 x 138 x 67	-	1246.00	30
44010	10	85-285V	≥ 0.9	-	6000K	80	38	-	50 x 130 x 138 x 67	-	1246.00	30
44020	20	85-285V	≥ 0.9	-	3000K	80	38	-	66 x 160 x 158 x 98	-	2237.00	30
44020	20	85-285V	≥ 0.9	-	4000K	80	38	-	66 x 160 x 158 x 98	-	2237.00	30
44020	20	85-285V	≥ 0.9	-	6000K	80	38	-	66 x 160 x 158 x 98	-	2237.00	30
44030	30	85-285V	≥ 0.9	-	3000K	80	38	-	77 x 178 x 180 x 98	-	2875.00	30
44030	30	85-285V	≥ 0.9	-	4000K	80	38	-	77 x 178 x 180 x 98	-	2875.00	30
44030	30	85-285V	≥ 0.9	-	6000K	80	38	-	77 x 178 x 180 x 98	-	2875.00	30

They not only put the spotlight on your decor, but also stand out as objects of desire on their own. The exemplary designs incorporate the superlative technology and LED efficiency and can be fixed or removed with a simple twist. Seamless swivel motion, and a sturdy durable body, these lights are flawless picks for subtly focussing just the right amount of light wherever you require!




NIO
LED SPOT LIGHT



RIO
LED SPOT LIGHT



OTIZ
COB DOWN LIGHT



DEEP JUNCTION BOX LIGHTS
NIO LED SPOT LIGHT

ITEM CODE	WATTAGE	OPERAT. VOLTAGE	POWER FACTOR	LUMEN OUTPUT	COLOUR TEMP.	CRI	BEAM ANGLE	IP	DIMENSIONS IN MM	CUT OUT DIMENS. IN MM	MRP	PKG
11002	2	-	≥ 0.5	-	3000K	80	38	-	42 x 17	33	240.00	100
11002	2	-	≥ 0.5	-	6000K	80	38	-	42 x 17	33	240.00	100
11002	2	-	≥ 0.5	-	RED	80	38	-	42 x 17	33	240.00	100
11002	2	-	≥ 0.5	-	GREEN	80	38	-	42 x 17	33	240.00	100
11002	2	-	≥ 0.5	-	BLUE	80	38	-	42 x 17	33	240.00	100
11002	2	-	≥ 0.5	-	PINK	80	38	-	42 x 17	33	240.00	100

RIO LED SPOT LIGHT (with Integrated Drivers)

16002	2	-	≥ 0.5	-	3000K	80	38	-	42 x 17	33	230.00	100
16002	2	-	≥ 0.5	-	6000K	80	38	-	42 x 17	33	230.00	100
16002	2	-	≥ 0.5	-	RED	80	38	-	42 x 17	33	230.00	100
16002	2	-	≥ 0.5	-	GREEN	80	38	-	42 x 17	33	230.00	100
16002	2	-	≥ 0.5	-	BLUE	80	38	-	42 x 17	33	230.00	100
16002	2	-	≥ 0.5	-	PINK	80	38	-	42 x 17	33	230.00	100

OTIZ COB DOWN LIGHT (Movable & Non Movable)

12003	3	-	≥ 0.9	-	3000K	80	38	-	70 x 35	55	263.00	100
12003	3	-	≥ 0.9	-	6000K	80	38	-	70 x 35	55	263.00	100
12003	3	-	≥ 0.9	-	RED	80	38	-	70 x 35	55	263.00	100
12003	3	-	≥ 0.9	-	GREEN	80	38	-	70 x 35	55	263.00	100
12003	3	-	≥ 0.9	-	BLUE	80	38	-	70 x 35	55	263.00	100
12003	3	-	≥ 0.9	-	PINK	80	38	-	70 x 35	55	263.00	100





ZIMA
LED STRICKER
DOWNLIGHT

They not only put the spotlight on your decor, but also stand out as objects of desire on their own. The exemplary designs incorporate the superlative technology and LED efficiency and can be fixed or removed with a simple twist.



YUBA
LED SURFACE
LIGHT




DEEP JUNCTION BOX LIGHTS
ZIMA LED STRICKER DOWNLIGHT

ITEM CODE	WATTAGE	OPERAT. VOLTAGE	POWER FACTOR	LUMEN OUTPUT	COLOUR TEMP.	CRI	BEAM ANGLE	IP	DIMENSIONS IN MM	CUT OUT DIMENS. IN MM	MRP	PKG
17003	3	-	≥ 0.9	-	3000K	80	120	-	68 x 14	-	145.00	100
17003	3	-	≥ 0.9	-	6000K	80	120	-	68 x 14	-	145.00	100
17003	3	-	≥ 0.9	-	RED	80	120	-	68 x 14	-	145.00	100
17003	3	-	≥ 0.9	-	GREEN	80	120	-	68 x 14	-	145.00	100
17003	3	-	≥ 0.9	-	BLUE	80	120	-	68 x 14	-	145.00	100
17003	3	-	≥ 0.9	-	PINK	80	120	-	68 x 14	-	145.00	100

YUBA LED SURFACE LIGHT

18005	5	-	≥ 0.9	-	3000K	80	120	-	68 x 14	-	195.00	50
18005	5	-	≥ 0.9	-	6000K	80	120	-	68 x 14	-	195.00	50
18005	5	-	≥ 0.9	-	RED	80	120	-	68 x 14	-	195.00	50
18005	5	-	≥ 0.9	-	GREEN	80	120	-	68 x 14	-	195.00	50
18005	5	-	≥ 0.9	-	BLUE	80	120	-	68 x 14	-	195.00	50
18005	5	-	≥ 0.9	-	PINK	80	120	-	68 x 14	-	195.00	50

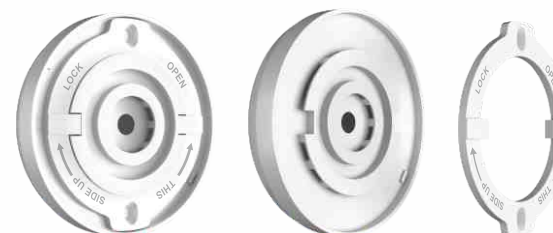



CLARO
LED DOWN LIGHT

Accentuate your spaces with ambient glow. Impeccably flexible, this downlight offers focussed lighting in the direction and intensity as desired. Perfect for contemporary places like art galleries, studios and homes.




XOLO
LED DOWN LIGHT



DEEP JUNCTION BOX LIGHTS
CLARO LED DOWN LIGHT

ITEM CODE	WATTAGE	OPERAT. VOLTAGE	POWER FACTOR	LUMEN OUTPUT	COLOUR TEMP.	CRI	BEAM ANGLE	IP	DIMENSIONS IN MM	CUT OUT DIMENS. IN MM	MRP	PKG
13003	3	-	≥ 0.9	-	3000K	80	120	-	80 x 46	50	204.00	50
13003	3	-	≥ 0.9	-	6000K	80	120	-	80 x 46	50	204.00	50
13003	3	-	≥ 0.9	-	RED	80	120	-	80 x 46	50	204.00	50
13003	3	-	≥ 0.9	-	GREEN	80	120	-	80 x 46	50	204.00	50
13003	3	-	≥ 0.9	-	BLUE	80	120	-	80 x 46	50	204.00	50
13003	3	-	≥ 0.9	-	PINK	80	120	-	80 x 46	50	204.00	50



XOLO LED DOWN LIGHT (3 IN 1)


16012	12+12	-	≥ 0.9	-	WH+BLU	80	120	-	130 x 55	55	785.00	50
16012	12+12	-	≥ 0.9	-	WH+GRN	80	120	-	130 x 55	55	785.00	50
16012	12+12	-	≥ 0.9	-	WH+RED	80	120	-	130 x 55	55	785.00	50
16012	12+12	-	≥ 0.9	-	WH+WW	80	120	-	130 x 55	55	785.00	50
16012	12+12	-	≥ 0.9	-	WH+PNK	80	120	-	130 x 55	55	785.00	50





POCO LED DOWN LIGHT

A beautiful silhouette, a unique shaped reflector, with an antiglare diffuser makes this downlight the ultimate choice for modern retail places like showrooms, art galleries and studios.



CONCEALED JUNCTION BOX LIGHTS POCO LED DOWN LIGHT

ITEM CODE	WATTAGE	OPERAT. VOLTAGE	POWER FACTOR	LUMEN OUTPUT	COLOUR TEMP.	CRI	BEAM ANGLE	IP	DIMENSIONS IN MM	CUT OUT DIMENS. IN MM	MRP	PKG
20005	5	85-285V	≥ 0.9	-	3000K	80	120	-	110 x 51	75	308.00	50
20005	5	85-285V	≥ 0.9	-	4000K	80	120	-	110 x 51	75	308.00	50
20005	5	85-285V	≥ 0.9	-	6000K	80	120	-	110 x 51	75	308.00	50
20005	5	85-285V	≥ 0.9	-	RED	80	120	-	110 x 51	75	308.00	50
20005	5	85-285V	≥ 0.9	-	GREEN	80	120	-	110 x 51	75	308.00	50
20005	5	85-285V	≥ 0.9	-	BLUE	80	120	-	110 x 51	75	308.00	50
20005	5	85-285V	≥ 0.9	-	PINK	80	120	-	110 x 51	75	308.00	50
20005	5	85-285V	≥ 0.9	-	RGB	80	120	-	110 x 51	75	428.00	50

20007	7	85-285V	≥ 0.9	-	3000K	80	120	-	110 x 51	75	340.00	50
20007	7	85-285V	≥ 0.9	-	4000K	80	120	-	110 x 51	75	340.00	50
20007	7	85-285V	≥ 0.9	-	6000K	80	120	-	110 x 51	75	340.00	50
20007	7	85-285V	≥ 0.9	-	RED	80	120	-	110 x 51	75	340.00	50
20007	7	85-285V	≥ 0.9	-	GREEN	80	120	-	110 x 51	75	340.00	50
20007	7	85-285V	≥ 0.9	-	BLUE	80	120	-	110 x 51	75	340.00	50
20007	7	85-285V	≥ 0.9	-	PINK	80	120	-	110 x 51	75	340.00	50
20007	7	85-285V	≥ 0.9	-	RGB	80	120	-	110 x 51	75	340.00	50

LED Lighting


Designed with finesse and care, explore our beautiful range of LED Downlights that add charm to your abode. With a distinct blend of unmatched functionality-the perfect beam angle, thin silhouette, and optimum brightness along with resplendent designs.



Gino
LED DOWNLIGHT



Stylo
LED DOWNLIGHT



CONCEALED JUNCTION BOX LIGHTS GINO LED DOWN LIGHT

ITEM CODE	WATTAGE	OPERAT. VOLTAGE	POWER FACTOR	LUMEN OUTPUT	COLOUR TEMP.	CRI	BEAM ANGLE	IP	DIMENSIONS IN MM	CUT OUT DIMENS.IN MM	MRP	PKG
26007	7	85-285V	≥ 0.9	-	3000K	80	120	-	110 x 40	75	285.00	50
26007	7	85-285V	≥ 0.9	-	4000K	80	120	-	110 x 40	75	285.00	50
26007	7	85-285V	≥ 0.9	-	6000K	80	120	-	110 x 40	75	285.00	50
26007	7	85-285V	≥ 0.9	-	RED	80	120	-	110 x 40	75	285.00	50
26007	7	85-285V	≥ 0.9	-	GREEN	80	120	-	110 x 40	75	285.00	50
26007	7	85-285V	≥ 0.9	-	BLUE	80	120	-	110 x 40	75	285.00	50
26007	7	85-285V	≥ 0.9	-	PINK	80	120	-	110 x 40	75	285.00	50

CONCEALED JUNCTION BOX LIGHTS STYLO LED DOWN LIGHT

21006	6	85-285V	≥ 0.9	-	3000K	80	120	-	110 x 48	75	350.00	50
21006	6	85-285V	≥ 0.9	-	4000K	80	120	-	110 x 48	75	350.00	50
21006	6	85-285V	≥ 0.9	-	6000K	80	120	-	110 x 48	75	350.00	50
21006	6	85-285V	≥ 0.9	-	RED	80	120	-	110 x 48	75	350.00	50
21006	6	85-285V	≥ 0.9	-	GREEN	80	120	-	110 x 48	75	350.00	50
21006	6	85-285V	≥ 0.9	-	BLUE	80	120	-	110 x 48	75	350.00	50
21006	6	85-285V	≥ 0.9	-	PINK	80	120	-	110 x 48	75	350.00	50


Robust, compact and aesthetically appealing, Downlights make up for the ultimate choice for both residential and commercial spaces. Perfectly crafted to offer focused lighting in three color temperatures, Downlights lend glare-free ambient glow for both lower and high ceilings. Elevate the experience of your space flawlessly!



Aston
LED DOWN LIGHT



FIGO
LED DOWN LIGHT




**CONCEALED JUNCTION BOX LIGHTS
ASTON LED DOWN LIGHT**

ITEM CODE	WATTAGE	OPERAT. VOLTAGE	POWER FACTOR	LUMEN OUTPUT	COLOUR TEMP.	CRI	BEAM ANGLE	IP	DIMENSIONS IN MM	CUT OUT DIMENS.IN MM	MRP	PKG
23006	6	85-285V	≥ 0.9	-	3000K	80	120	-	110 x 50	75	360.00	50
23006	6	85-285V	≥ 0.9	-	4000K	80	120	-	110 x 50	75	360.00	50
23006	6	85-285V	≥ 0.9	-	6000K	80	120	-	110 x 50	75	360.00	50
23006	6	85-285V	≥ 0.9	-	RED	80	120	-	110 x 50	75	360.00	50
23006	6	85-285V	≥ 0.9	-	GREEN	80	120	-	110 x 50	75	360.00	50
23006	6	85-285V	≥ 0.9	-	BLUE	80	120	-	110 x 50	75	360.00	50
23006	6	85-285V	≥ 0.9	-	PINK	80	120	-	110 x 50	75	360.00	50

**CONCEALED JUNCTION BOX LIGHTS
FIGO LED DOWN LIGHT**

24007	7	85-285V	≥ 0.9	-	3000K	80	120	-	110 x 40	75	560.00	50
24007	7	85-285V	≥ 0.9	-	4000K	80	120	-	110 x 40	75	560.00	50
24007	7	85-285V	≥ 0.9	-	6000K	80	120	-	110 x 40	75	560.00	50
24007	7	85-285V	≥ 0.9	-	RED	80	120	-	110 x 40	75	560.00	50
24007	7	85-285V	≥ 0.9	-	GREEN	80	120	-	110 x 40	75	560.00	50
24007	7	85-285V	≥ 0.9	-	BLUE	80	120	-	110 x 40	75	560.00	50
24007	7	85-285V	≥ 0.9	-	PINK	80	120	-	110 x 40	75	560.00	50

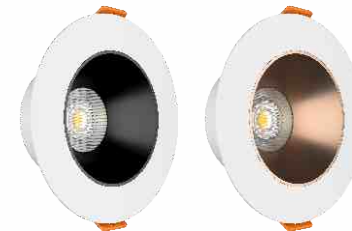

LEXA
LED STREET LIGHT

DON'T FEAR IN DARK

Let the Darkness know who is boss with Flood Lights



BRILEX
LED FLOOD LIGHT




**OUTDOOR LED LIGHTS
LEXA LED STREET LIGHTS**

ITEM CODE	WATTAGE	OPERAT. VOLTAGE	POWER FACTOR	LUMEN OUTPUT	COLOUR TEMP.	CRI	BEAM ANGLE	IP	DIMENSIONS IN MM	CUT OUT DIMENS. IN MM	MRP	PKG
60020	20	-	≥ 0.9	2400	3000K	-	120	IP66	340 x 125 x 50	-	1864.00	20
60020	20	-	≥ 0.9	2400	6000K	-	120	IP66	340 x 125 x 50	-	1864.00	20
60030	30	-	≥ 0.9	3600	3000K	-	120	IP66	340 x 125 x 50	-	2577.00	20
60030	30	-	≥ 0.9	3600	6000K	-	120	IP66	340 x 125 x 50	-	2577.00	20
60050	50	-	≥ 0.9	6000	3000K	-	120	IP66	390 x 145 x 50	-	3674.00	10
60050	50	-	≥ 0.9	6000	6000K	-	120	IP66	390 x 145 x 50	-	3674.00	10
60100	100	-	≥ 0.9	10000	3000K	-	120	IP66	450 x 170 x 60	-	7562.00	10
60100	100	-	≥ 0.9	10000	6000K	-	120	IP66	450 x 170 x 60	-	7562.00	10

BRILEX LED FLOOD LIGHTS

65030	30	-	≥ 0.9	3600	3000K	-	120	IP66	215 x 215 x 35	-	2396.00	20
65030	30	-	≥ 0.9	3600	6000K	-	120	IP66	215 x 215 x 35	-	2396.00	20
65050	50	-	≥ 0.9	6000	3000K	-	120	IP66	250 x 250 x 50	-	2800.00	10
65050	50	-	≥ 0.9	6000	6000K	-	120	IP66	250 x 250 x 50	-	2800.00	10
65100	100	-	≥ 0.9	10000	3000K	-	120	IP66	310 x 300 x 50	-	5010.00	10
65100	100	-	≥ 0.9	10000	6000K	-	120	IP66	310 x 300 x 50	-	5010.00	10
65200	200	-	≥ 0.9	20000	3000K	-	120	IP66	410 x 375 x 50	-	11500.00	5
65200	200	-	≥ 0.9	20000	6000K	-	120	IP66	410 x 375 x 50	-	11500.00	5

Street & Flood Lights



E-LITE
LED FLOOD LIGHT


**OUTDOOR LED LIGHTS
E-LITE LED FLOOD LIGHTS**

ITEM CODE	WATTAGE	OPERAT. VOLTAGE	POWER FACTOR	LUMEN OUTPUT	COLOUR TEMP.	CRI	BEAM ANGLE	IP	DIMENSIONS IN MM	CUT OUT DIMENS. IN MM	MRP	PKG
67050	50	-	≥ 0.9	5250	3000K	-	120	IP66	280 x 220 x 50	-	2450.00	10
67050	50	-	≥ 0.9	5250	6000K	-	120	IP66	280 x 220 x 50	-	2450.00	10
67100	100	-	≥ 0.9	10500	3000K	-	120	IP66	345 x 275 x 45	-	4450.00	10
67100	100	-	≥ 0.9	10500	6000K	-	120	IP66	345 x 275 x 45	-	4450.00	10

GLEAM LED FLOOD LIGHTS

66010	10	-	≥ 0.9	1200	3000K	-	120	IP66	145 x 123 x 42	-	1195.00	30
66010	10	-	≥ 0.9	1200	6000K	-	120	IP66	145 x 123 x 42	-	1195.00	30
66020	20	-	≥ 0.9	2400	3000K	-	120	IP66	145 x 123 x 42	-	1620.00	30
66020	20	-	≥ 0.9	2400	6000K	-	120	IP66	145 x 123 x 42	-	1620.00	30


GLEAM
LED FLOOD LIGHT

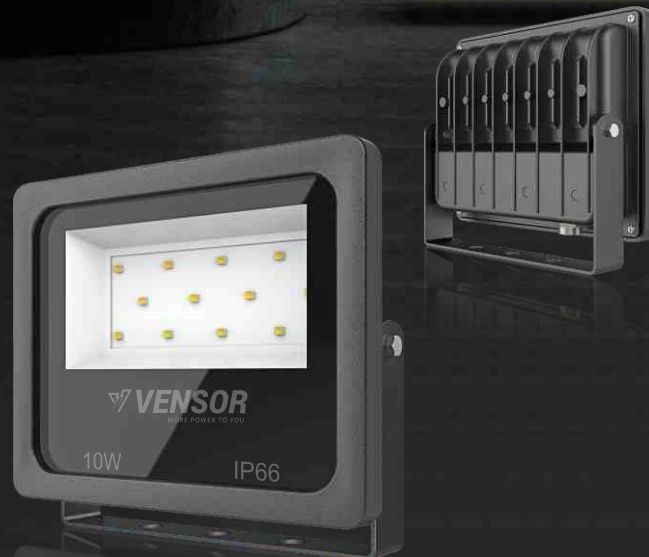

The floodlights are exclusively designed with a high-performance electronic in-built driver and heat sink to provide a wide area of illumination. Thanks to the IP66 rating, the floodlights can be used as security lighting, landscape lighting, or to highlight architectural features. The die-cast metal body and high surge protection make light highly efficient floodlights.

ZENTILO

LED T5 BATTEN LIGHTS




LED T5 BATTEN LIGHTS ZENTILO LED T5 BATTEN LIGHTS

ITEM CODE	WATTAGE	OPERAT. VOLTAGE	POWER FACTOR	LUMEN OUTPUT	COLOUR TEMP.	CRI	BEAM ANGLE	IP	DIMENSIONS IN MM	CUT OUT DIMENS. IN MM	MRP	PKG
55005	5	85-285V	≥ 0.9	-	3000K	80	-	-	270 x 22 x 37	-	330.00	25
55005	5	85-285V	≥ 0.9	-	4000K	80	-	-	270 x 22 x 37	-	330.00	25
55005	5	85-285V	≥ 0.9	-	6000K	80	-	-	270 x 22 x 37	-	330.00	25
55010	10	85-285V	≥ 0.9	-	3000K	80	-	-	580 x 22 x 37	-	412.00	25
55010	10	85-285V	≥ 0.9	-	4000K	80	-	-	580 x 22 x 37	-	412.00	25
55010	10	85-285V	≥ 0.9	-	6000K	80	-	-	580 x 22 x 37	-	412.00	25
55022	22	85-285V	≥ 0.9	-	3000K	80	-	-	1140 x 22 x 37	-	492.00	40
55022	22	85-285V	≥ 0.9	-	4000K	80	-	-	1140 x 22 x 37	-	492.00	40
55022	22	85-285V	≥ 0.9	-	6000K	80	-	-	1140 x 22 x 37	-	492.00	40



These ZENTILO LED Battens are the ideal replacements for existing fluorescent T5 fittings. Using a fraction of the power consumed by fluorescent tube lights, these LED lights can last up to three times longer. Their slim form and impact resistant housing leads to enhanced aesthetics and durability. Switch to LED Battens to reduce energy consumption and thereby minimize the impact of fossil fuels on the planet!



ZENILO

LED T5 BATTEN LIGHTS

LED T8 BATTEN LIGHTS ZENILO LED T8 BATTEN LIGHTS

ITEM CODE	WATTAGE	OPERAT. VOLTAGE	POWER FACTOR	LUMEN OUTPUT	COLOUR TEMP.	CRI	BEAM ANGLE	IP	DIMENSIONS IN MM	CUT OUT DIMENS. IN MM	MRP	PKG
55040	40	85-285V	≥ 0.9	3800	3000K	80	-	-	1150 x 33 x 38	-	1080.00	20
55040	40	85-285V	≥ 0.9	3800	6500K	80	-	-	1150 x 33 x 38	-	1080.00	20

LED T5 BATTEN LIGHTS ZENILO LED T5 BATTEN LIGHTS ALUMINUM BODY

ITEM CODE	WATTAGE	OPERAT. VOLTAGE	POWER FACTOR	LUMEN OUTPUT	COLOUR TEMP.	CRI	BEAM ANGLE	IP	DIMENSIONS IN MM	CUT OUT DIMENS. IN MM	MRP	PKG
55045	45	85-285V	≥ 0.9	4500	3000K	80	-	-	1183 x 24 x 38	-	1240.00	25
55045	45	85-285V	≥ 0.9	4500	6500K	80	-	-	1183 x 24 x 38	-	1240.00	25

T5
T8

What Light Shines at night!
He never knew. Light will blind him.



QUORRA


LED MIRROR LIGHT

Seeing things from an alternate perspective, and inviting change goes far in having a solid existence. Similarly, a little change in the ceiling can have an immense effect in the general appearance of your home and your state of being.

MIRROR LIGHTS QUORRA LED MIRROR LIGHTS

ITEM CODE	WATTAGE	OPERAT. VOLTAGE	POWER FACTOR	LUMEN OUTPUT	COLOUR TEMP.	CRI	BEAM ANGLE	IP	DIMENSIONS IN MM	CUT OUT DIMENS. IN MM	MRP	PKG
56020	20	85-285V	≥ 0.6	1800	3000K	80	-	-	600 x 48 x 82	-	1500.00	12
56020	20	85-285V	≥ 0.6	1800	4000K	80	-	-	600 x 48 x 82	-	1500.00	12
56020	20	85-285V	≥ 0.6	1800	6500K	80	-	-	600 x 48 x 82	-	1500.00	12
56020	20	85-285V	≥ 0.6	1800	3 IN 1	80	-	-	600 x 48 x 82	-	1500.00	12





Innovation
At the core of our DNA.

VENSOR aims to make everything better and brighter. The LED bulbs from VENSOR are a great choice for anyone looking to reduce their energy consumption and saving money on their electricity bills. But that's just one part of the story. VENSOR ensures that you will always find the right product for any application. Whether it is style, performance, or efficiency, the innovation never stops.

BULB
DECO DECORATIVE BULB

ITEM CODE	WATTAGE	OPERAT. VOLTAGE	POWER FACTOR	LUMEN OUTPUT	COLOUR TEMP.	CRI	BEAM ANGLE	IP	DIMENSIONS IN MM	CUT OUT DIMENS. IN MM	MRP	PKG
10005	0.5	85-240V	-	-	RED	-	240	-	45 x 67	-	61.00	60
10005	0.5	85-240V	-	-	GREEN	-	240	-	45 x 67	-	61.00	60
10005	0.5	85-240V	-	-	BLUE	-	240	-	45 x 67	-	61.00	60
10005	0.5	85-240V	-	-	YELLOW	-	240	-	45 x 67	-	61.00	60
10005	0.5	85-240V	-	-	WHITE	-	240	-	45 x 67	-	61.00	60
10005	0.5	85-240V	-	-	ORANGE	-	240	-	45 x 67	-	61.00	60
10005	0.5	85-240V	-	-	PINK	-	240	-	45 x 67	-	61.00	60



MIRAZ

UP DOWN
WALL LIGHT

UP DOWN WALL LIGHT SERIES

Enhance the interior !! Because your home deserve the Best.



AURO


BULKHEAD
WALL LIGHT


WALL LIGHT MIRAZ UP DOWN WALL LIGHT

ITEM CODE	WATTAGE	OPERAT. VOLTAGE	POWER FACTOR	LUMEN OUTPUT	COLOUR TEMP.	CRI	BEAM ANGLE	IP	DIMENSIONS IN MM	CUT OUT DIMENS.IN MM	MRP	PKG
70203	2 x 3W	-	≥ 0.9	70	3000K	-	38	IP65	340 x 125 x 50	-	1120.00	40

WALL LIGHT AURO BULKHEAD WALL LIGHT

75010	10W	-	≥ 0.9	100	6000K	-	110	IP65	170 x 65 x 48	-	460.00	50
75020	20W	-	≥ 0.9	100	6000K	-	110	IP65	210 x 95 x 60	-	675.00	50



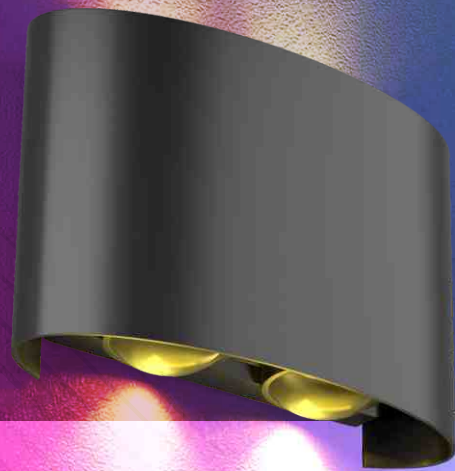

OLIVE

UP DOWN WALL LIGHT


UP DOWN WALL LIGHT SERIES

Enhance the interior !! Because your home deserve the Best.




ORBIT

UP DOWN WALL LIGHT




WALL LIGHT OLIVE UP DOWN WALL LIGHT

ITEM CODE	WATTAGE	OPERAT. VOLTAGE	POWER FACTOR	LUMEN OUTPUT	COLOUR TEMP.	CRI	BEAM ANGLE	IP	DIMENSIONS IN MM	CUT OUT DIMENS.IN MM	MRP	PKG
71102	2 x 1W	-	≥ 0.9	70	3000K	-	38	IP65	85 x 36 x 78	-	590.00	60
71104	4 x 1W	-	≥ 0.9	70	3000K	-	38	IP65	250 x 250 x 50	-	830.00	40
71106	6 x 1W	-	≥ 0.9	70	3000K	-	38	IP65	310 x 300 x 50	-	970.00	30

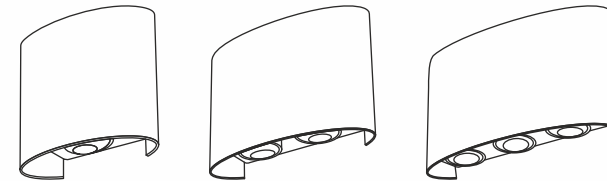

WALL LIGHT ORBIT UP DOWN WALL LIGHT

ITEM CODE	WATTAGE	OPERAT. VOLTAGE	POWER FACTOR	LUMEN OUTPUT	COLOUR TEMP.	CRI	BEAM ANGLE	IP	DIMENSIONS IN MM	CUT OUT DIMENS.IN MM	MRP	PKG
72104	4W	-	≥ 0.9	70	3000K	-	38	IP65	340 x 125 x 50	-	830.00	60





VOILA

WALL LIGHTS

UPDOWN
WALL LIGHT SERIES
Enhance the interior !!
Because your home
deserve the Best.



WALL LIGHT VOILA WALL LIGHT ROUND

ITEM CODE	WATTAGE	OPERAT. VOLTAGE	POWER FACTOR	LUMEN OUTPUT	COLOUR TEMP.	CRI	BEAM ANGLE	IP	DIMENSIONS IN MM	CUT OUT DIMENS.IN MM	MRP	PKG
73105	5W	-	≥ 0.9		3000K	-	110	IP54	108 x 108 x 85	-	1050.00	30
73105	5W	-	≥ 0.9		3000K	-	110	IP54	108 x 108 x 85	-	1050.00	30
73105	5W	-	≥ 0.9		6000K	-	110	IP54	108 x 108 x 85	-	1050.00	30
73310	10W	-	≥ 0.9		3000K	-	110	IP54	100 x 105 x 136	-	1440.00	20
73310	10W	-	≥ 0.9		3000K	-	110	IP54	100 x 105 x 136	-	1440.00	20
73310	10W	-	≥ 0.9		6000K	-	110	IP54	100 x 105 x 136	-	1440.00	20

WALL LIGHT VOILA WALL LIGHT SQUARE

73205	5W	-	≥ 0.9		3000K	-	110	IP54	108 x 108 x 85	-	1050.00	30
73205	5W	-	≥ 0.9		3000K	-	110	IP54	108 x 108 x 85	-	1050.00	30
73205	5W	-	≥ 0.9		6000K	-	110	IP54	108 x 108 x 85	-	1050.00	30
73410	10W	-	≥ 0.9		3000K	-	110	IP54	100 x 105 x 136	-	1440.00	20
73410	10W	-	≥ 0.9		3000K	-	110	IP54	100 x 105 x 136	-	1440.00	20
73410	10W	-	≥ 0.9		6000K	-	110	IP54	100 x 105 x 136	-	1440.00	20

FUSSION


BEDSIDE LED WALL LIGHT

The future is brighter when we switch to LED lights. They not only offer high power savings of more than 50%, they also use environment-friendly materials and ensure lower heat dissipation. LEDs are thus the de facto choice for lighting solutions. Switch to VENSOR LEDs and make them a part of your daily living.



WALL LIGHT FUSSION BEDSIDE LED WALL LIGHT

ITEM CODE	WATTAGE	OPERAT. VOLTAGE	POWER FACTOR	LUMEN OUTPUT	COLOUR TEMP.	CRI	BEAM ANGLE	IP	DIMENSIONS IN MM	CUT OUT DIMENS. IN MM	MRP	PKG
74306	3+6W	-	≥ 0.9	-	3000K	-	120	IP20	104 x 116 x 182	-	3850.00	20

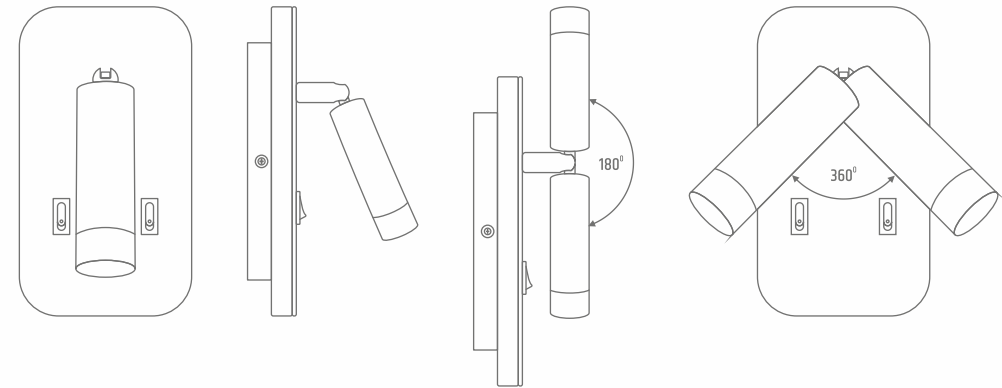

FEATURES

- 3W Adjustable focused spotlight for reading purpose.
- 6W Indirect light for enhancing your room ambience.
- LM80 Tested Technology provides long life.
- Robust design with aluminum body.
- Driver designed with 380V high voltage and 2.5kv Surge protection.



Environment-friendly lights.
Make it a part of your lifestyle.

BRILLO

LED ROPE LIGHT




ROPE LIGHT BRILLO LED ROPE LIGHT

ITEM CODE	WATTAGE	OPERAT. VOLTAGE	POWER FACTOR	LUMEN OUTPUT	COLOUR TEMP.	CRI	BEAM ANGLE	IP	DIMENSIONS IN MM	CUT OUT DIMENS. IN MM	MRP	PKG
91207	7W	-	> 0.9	120	WH	-	240	IP65	50 MTR	-	10370.00	4
91207	7W	-	> 0.9	120	NDL	-	240	IP65	50 MTR	-	10370.00	4
91207	7W	-	> 0.9	120	WW	-	240	IP65	50 MTR	-	10370.00	4
91207	7W	-	> 0.9	120	RED	-	240	IP65	50 MTR	-	10370.00	4
91207	7W	-	> 0.9	120	GREEN	-	240	IP65	50 MTR	-	10370.00	4
91207	7W	-	> 0.9	120	BLUE	-	240	IP65	50 MTR	-	10370.00	4
91207	7W	-	> 0.9	120	PINK	-	240	IP65	50 MTR	-	10370.00	4
91207	7W	-	> 0.9	120	AMBER	-	240	IP65	50 MTR	-	10370.00	4

ROPE LIGHT CONNECTOR

ITEM CODE	WATT PER MTR	COLOUR TEMP.	LED PER MTR	PF	LENGTH	IP	MRP	PKG
90090	-	-	-	-	-	-	200.00	100.00

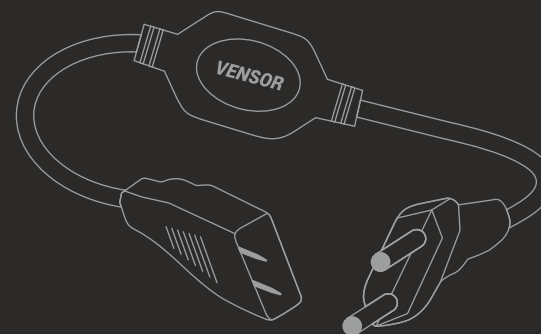

Brighter moments on a darker night. **Brillo Rope** lights are the ideal solutions for your dark evenings.


VINIXA
TURN ON BRILLIANCE




Experience the
Greatest
thrill in technology!

FAVIT
SWITCH TO SMART

Choice,
for people
who want
more



ARTEMIS
Sophistication redefined

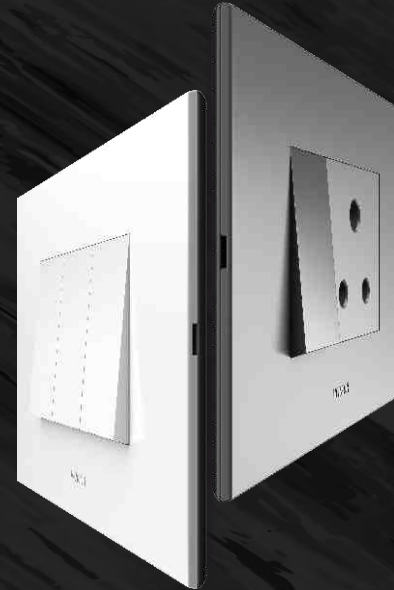


Stylish
Smart & Luxurious
Re-defining smart switches

Anzo
BOLD. BRILLIANT. UNPARALLELED.

The
Exclusive
Collection of
Non-Modular
Accessories



V-CONNECT
TURN ON BRILLIANCE



IN A
**WORLD OF
INCREDIBLE
IDEAS**



V-SECURE
SWITCHGEAR

Streamline
your Safety



Wires & Cables

YOUR
HOME
SAFETY



Notes



A series of horizontal dashed lines spanning the width of the page, intended for writing notes.

Notes




A series of horizontal dashed lines spanning the width of the page, intended for writing notes.



 /vensorindia

 /vensorindia

 /vensorindia

 Customer Care No.
1800 419 7292

ISO
9001:2015

WITH
ISO
14001



VENSOR ELECTRICALS PVT. LTD.

Gala No. 15 & 16, Ground Floor, Blue Chip Industrial Estate No. 5,
Satali Road, Village Waliv, Vasai (E)-401208, Dist. Palghar, Maharashtra INDIA
E-mail: info@vensorindia.com | www.vensorindia.com

Regd. & Corporate Office : A-59, Block A, Sector 63,
Noida, Gautam Budh Nagar, Uttar Pradesh 201307 INDIA

